


NOTES:

1. INSTALLATION SHALL BE DONE BY THE GENERAL CONTRACTOR OR THE APPROPRIATE SUBCONTRACTOR.
2. CONCRETE COLOR: C-1 NATURAL
3. CONCRETE TEXTURE: T-2 LIGHT SANDBLAST
4. SEALER: STANDARD GLOSS SEALER
5. ALL ELECTRICAL CONDUIT, KNOCKOUTS, AND ENCLOSURES SHALL BE PURCHASED BY THE CONTRACTOR AND SUPPLIED TO THE PRE-CAST MANUFACTURER.
6. PROVIDE AS-BUILT OF BOLLARD AND CUT SHEETS OF ENCLOSURE FOR REVIEW, PRIOR TO CONSTRUCTION.
7. ENCLOSURE MUST SIT PROUD FROM FACE OF BOLLARD TO ENSURE THE WATERTIGHT HINGED COVER WILL CLOSE PROPERLY.
8. ALL EDGES TO HAVE 1/4" RADIUS MINIMUM AND MANUFACTURING TOLERANCE OF $\pm 1/4"$
9. PRE-CAST MANUFACTURER TO SUPPLY (4) 1/2"DIA. X 4 1/2" L THREADED ANCHOR BOLTS FOR ANCHORING. ANCHORING REQUIRED AS SHOWN IN DETAIL 'A'
10. APPROX. WT: 374 LBS.

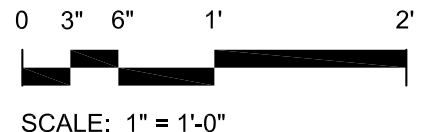

CITY OF FREMONT PARK STANDARD DETAILS

POWER BOLLARD

DATE APPROVED BY CITY COUNCIL
December 13, 2011

RESOLUTION NO. 2011-65

SENIOR LANDSCAPE ARCHITECT

COMMUNITY SERVICES DIRECTOR

APR.	REVISED	DATE
REVISIONS		

FILE NO. PSD ELE-3.DWG	SCALE 1" = 1'-0"	DRAWN MAM	CHECKED RER	DATE 03/11/2011	DWG NO. PSD ELE-3	1 OF 1
---------------------------	---------------------	--------------	----------------	--------------------	----------------------	--------